




STS 130 – Suitable for the construction industry with effective filter cleaning, H certified

With standard pre-filter and HEPA filter. Filter cleaning through air pulse process. With 3-stage dust filtration: 1. Stage for coarse dust, 2. Stage with 99.9 % via a polyester pre-filter, 3. Stage via 2 x HEPA filters with 99.995 %. Dust is collected in a transparent and easily transportable plastic bag (Dustbag).

Including hand tube with floor suction nozzle and rubber strip, brush strip, hose (length 5 m, hose connection Ø38 mm, antistatic), Dustbag and cable ties .

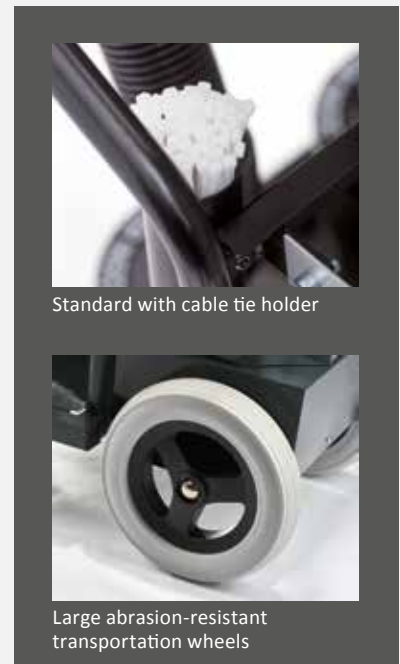

Standard with cable tie holder

Large abrasion-resistant transportation wheels

Technical data

Ref. No.		617000
Voltage	V	230
Frequency	Hz	50/60
Power input	kW	1,2
Operating weight	kg	42
Dimensions L x W x H	cm	73 x 41 x 130
Noise level	dB(A)	78
Suction hose, antistatic	m	5
Ø – suction outlet	mm	38
Underpressure	kPa	23
Suction capacity	m ³ /h	170
Filter cleaning		manually
Filter class		HEPA 13

Special characteristics

- Robust in design
- Dust separation in Dustbag
- Large abrasion-resistant transportation wheels
- Antistatic hoses
- Certified according to dust class H

